

CIRCUIT BREAKERS - FLAT PAK PANEL MOUNT

Bussmann
Thermal Type III

Ampere Rating	1/4" Q.C 3/8"-24 Thread	1/4" Q.C 7/16"-28 Thread	10-32 90° bend Screw Terminal 3/8"-24 Thread	6-32 90° bend Screw Terminal 7/16"-28 Thread
	Part Number	Part Number	Part Number	Part Number
5A	SWE-17405-312	SWE-17405-311	SWE-17405-332	SWE-17405-331
6A	SWE-17406-312	SWE-17406-311	SWE-17406-332	SWE-17406-331
7A	SWE-17407-312	SWE-17407-311	SWE-17407-332	SWE-17407-331
8A	SWE-17408-312	SWE-17408-311	SWE-17408-332	SWE-17408-331
10A	SWE-17410-312	SWE-17410-311	SWE-17410-332	SWE-17410-331
15A	SWE-17415-312	SWE-17415-311	SWE-17415-332	SWE-17415-331
20A	SWE-17420-312	SWE-17420-311	SWE-17420-332	SWE-17420-331
25A	SWE-17425-312	SWE-17425-311	SWE-17425-332	SWE-17425-331
30A	SWE-17430-312	SWE-17430-311	SWE-17430-332	SWE-17430-331
35A	-	-	SWE-17435-332	SWE-17435-331
40A	-	-	SWE-17440-332	SWE-17440-331



CIRCUIT BREAKERS

I.R.: 200A at 250VAC
Voltage: 32VDC, 250VAC
Reset Mechanism: Type III, Manual Reset
Body: UL 94V-0 thermoplastic, rated IP54 (except at terminals).
Pack Size: Stock lines 1pc, indent items 250pcs
Options: Clear Waterproof Boot.
 3/8"-24 (SWE- B151-7135-3)
 7/16"-28 (SWE- B151-7135-1)
Notes: SAE J1171 (Ignition Protected)

Approvals: SAE SAE





Spare Pack (SP):
contains 1pc of one rating.



Quick Connect Terminal



Screw Terminal

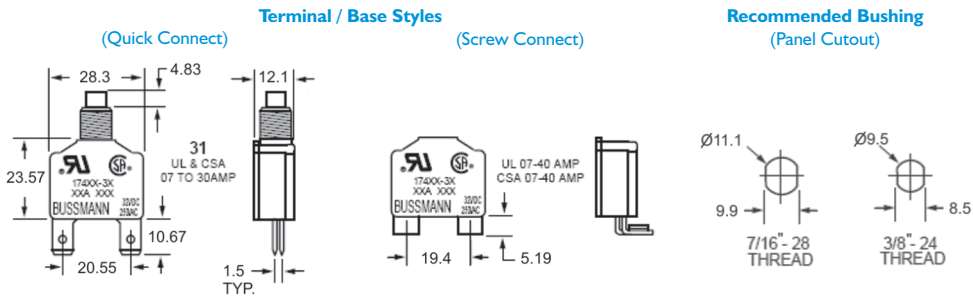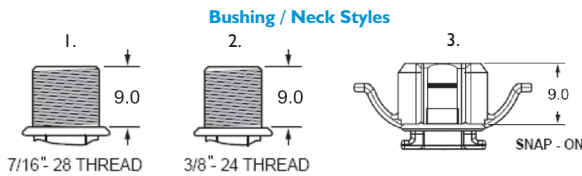

Email: sales@swecheck.com.au
 Web: www.swecheck.com.au

Phone: +61 3 9521 6133
 Fax: +61 3 9521 6177